

GALVANIC/DISSIMILAR METAL CORROSION

What it is and how to avoid it

Contact between dissimilar metals occurs frequently but is often not a problem. The aluminium head on a cast iron block, the solder on a copper pipe, galvanising on a steel purlin and the steel fastener in an aluminium sheet are common examples.

What causes galvanic corrosion?

For galvanic or dissimilar or electrolytic corrosion to occur, three conditions must be met:

- > the metal join must be wet with a conductive liquid
- > there must be metal to metal contact
- > the metals must have sufficiently different potentials.

Wetting the join

The conductive liquid or electrolyte could be rainwater or even water from condensation. The greater the conductivity the more severe the galvanic effects. Salt or industrial pollution significantly increases the conductivity of water so galvanic effects are normally more severe near the coast or in heavy industrial areas. Low conductivity, pure rainwater will only cause slight galvanic effects. One complication is that during evaporation, water films become more conductive so initially benign water may cause quite

active galvanic effects as the liquid in the crevice under a bolt or clamp becomes more concentrated. Water may be excluded by design or the use of adhesive sealants.

Metal to metal contact

Galvanic corrosion can only occur if the dissimilar metals are in electrical contact. The contact may be direct or by an external pipe or wire or bolt. If the dissimilar metals are insulated from each other by suitable plastic strips, washers or sleeves then galvanic corrosion cannot occur. Paint is not a reliable separator from direct contact although painting all of the noble metal is quite effective. Painting the active metal causes drill holes at coating defects.

Potential differences

All metals dissolve to some extent when they are wetted with a conductive liquid. The degree of dissolution is greatest with active or sacrificial metals such as magnesium and zinc and they have the most negative potential. In contrast, noble or passive metals such as gold or graphite are relatively inert and have a more positive potential. Stainless steel is in the middle although it is more noble than carbon steel. The potential can be measured with a reference electrode and used to construct a galvanic series as shown on page 2 (ASTM Standard G82).

When two metals are connected and in contact with a conducting liquid, the more active metal will corrode and protect the noble metal. Zinc is more negative than steel and so the zinc coating of galvanised steel will corrode to protect the steel at scratches or cut edges. The stainless steels, including 304 and 316, are more positive than zinc and steel, so when stainless steel is in contact with galvanised steel and is wet, the zinc will corrode first, followed by the steel, while the stainless steel will be protected by this galvanic activity and will not corrode. The rate of galvanic attack is governed by the size of the potential difference.

As a rule of thumb, if the potential difference is less than 0.1 volt, then it is unlikely that galvanic corrosion will be significant.

If all three conditions are met then galvanic corrosion is probable and the rate of corrosion will be influenced by the relative area and the current density delivered by the noble metal.

Relative wetted surface area

If a noble metal like stainless steel has a large surface area in contact with the electrolyte while the sacrificial metal (such as galvanised steel) has a very small surface area in contact with the electrolyte, then the stainless steel will

>FREQUENTLY ASKED QUESTIONS

generate a large corrosion current which will be concentrated on a small area of sacrificial metal. The galvanised steel will corrode quickly – first the zinc then the underlying steel – and so galvanised fasteners in stainless steel are not acceptable. However, a stainless screw in galvanised steel is frequently used although a mound of zinc corrosion product will accumulate around the fastener. This is because the ratio of wetted noble fastener in an active metal might change from a 1:50 ratio to 1:1 during drying after a rainstorm. If contaminants are significant this means that avoiding dissimilar metal pairs may be a preferred option to prevent galvanic attack.

As a rule of thumb, if the wetted area of the corroding metal is 10 times the wetted area of the noble metal, then galvanic effects are not serious although the larger the ratio the less the effect.

Available current density


Stainless steel has an effective passive film so the available corrosion current is quite low. If the behaviour of a copper/steel and a stainless steel/steel couple is compared, the copper/steel coupling is a more significant galvanic problem despite the similar potential separation of 0.35 volts.

Examples of acceptable galvanic pairs include:

Galvanised steel pipe hangers are used to hang stainless steel piping externally around chemical plants. The surface area ratio is bad with large area of stainless steel to small area of active zinc/steel but the rainwater is usually of quite low conductivity and 20 year service life is normal.

In the water industries, galling between stainless steel threads and nuts has been avoided by using aluminium bronze nuts on stainless steel studs or bolts. Although aluminium bronze is more active than stainless steel, the conductivity of the water, and hence the corrosion rate, is generally quite low. The nuts will require replacement but only at times of major overhaul.

One unacceptable case was a gasket with a carbon black loading so high it was conductive and caused severe galvanic attack of a 316 stainless lug. Graphite gaskets have caused similar problems.

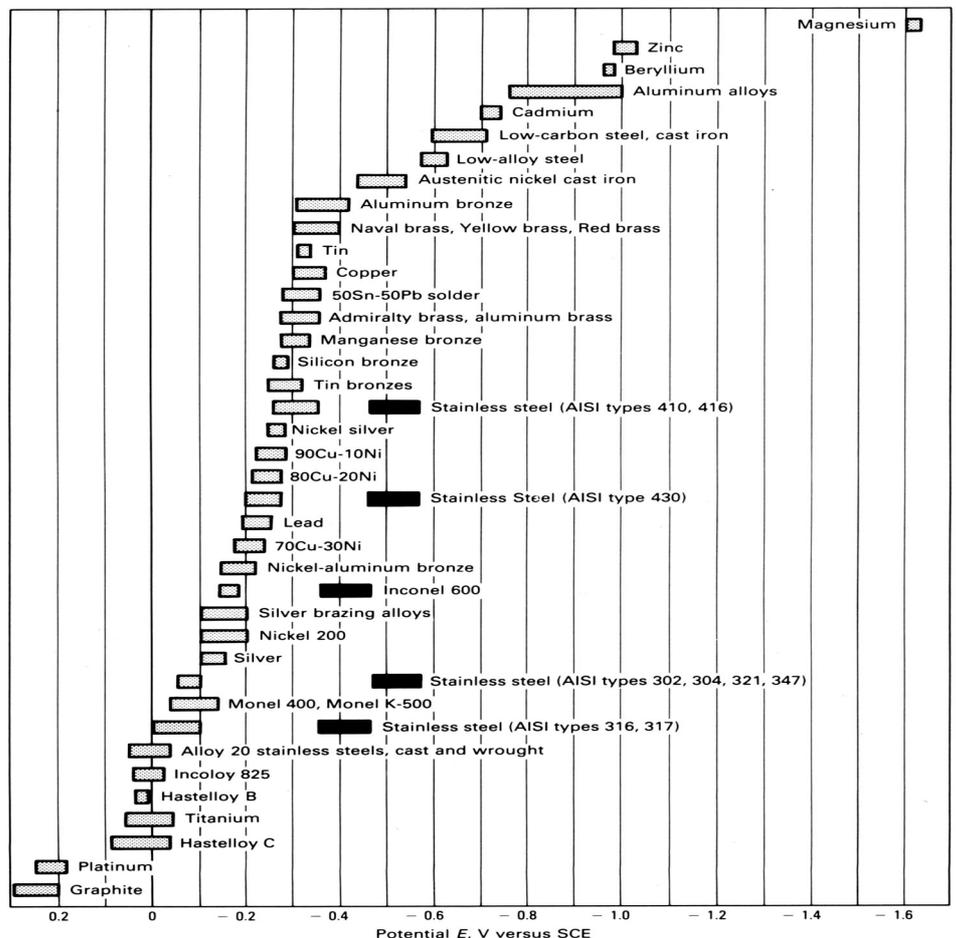

>TECHNICAL FAQs

The technical recommendations contained in this publication are necessarily of a general nature and should not be relied on for specific applications without first securing competent advice. Whilst ASSDA has taken all reasonable steps to ensure the information contained herein is accurate and current, ASSDA does not warrant the accuracy or completeness of the information and does not accept liability for errors or omissions.